


# HEMERA 45

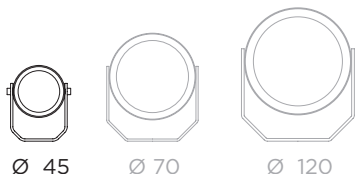

## OUTDOOR RANGE

This spotlight is as compact as it is efficient, offering wide range of optics and two types of high-efficiency LEDs.

Machined in one piece using the best aluminium alloys, it benefits from anodisation treatment. Anodisation is a surface treatment that makes it possible to protect or decorate aluminium or titanium parts with marine-quality anodic oxidation. This offers materials increased resistance to wear, corrosion and heat.

Its high-performance optics are protected from external aggressions and intrusions thanks to a polycarbonate screen, resistant to UV and any impacts.

Highly robust, it can resist wear due to harsh conditions such as sea air, strong gusts of wind or extreme temperatures.

Available on various supports, the HEMERA 45 is perfect for highlighting a precise point via an ultra-intensive beam, or for creating more homogenous lighting thanks to a choice of optics offering wider beams.

## FEATURES

- Zero condensation
- Anti-corrosion
- Beams from 4°
- Colour temperatures: 2700° k, 3000° k, 3500° k, 4000° k
- Maximum LED power up to 6 W
- LEDs sorted on 2 MacAdam Ellipses

## OPTIONS

- RGBW
- Tunable white
- Dim to warm
- Other colour temperatures
- Other beams
- Other finishes (*anodising or powder-coated painting*)


## ACCESSORIES

- Elliptical filters
- Honeycomb grille
- Cap/snoot
- Pole


## CONTROL\*

- 0-10V
- DMX
- DALI
- Wireless


\*According to driver choice

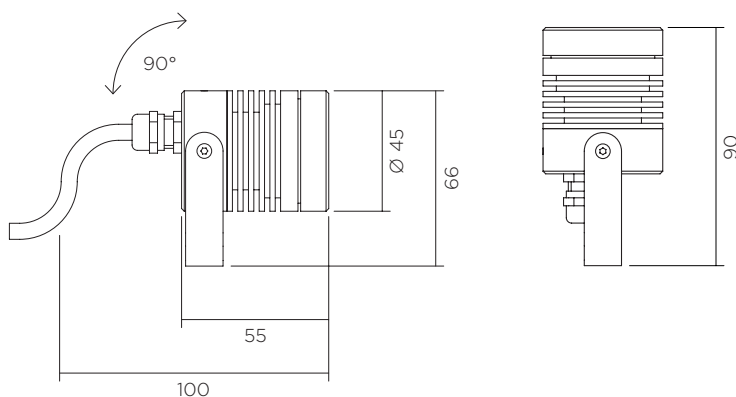

355° rotation system for quick and easy adjustment of elliptical beams

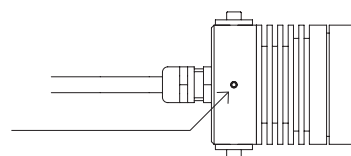

Bracket mounting detail



## ACCESSORIES

HEMERA 45 CAP & HONEYCOMB GRILLE

# HEMERA 45



## POWER\* AND PHOTOMETRY

INDICATIVE DATA FOR LED 3000° K


LED type	Voltage	Max direct current	Power	Beams	Candelas in the axis	Lumens output
LED 1	3 Vdc	900 mA	3 W	4°	28 105 Cds	214 Lms
				7°	8 214 Cds	198 Lms
				13°	3 101 Cds	196 Lms
				17°	984 Cds	184 Lms
				21°	631 Cds	149 Lms
				33°	390 Cds	159 Lms
				52°	286 Cds	193 Lms
LED 2	12 Vdc	500 mA	6 w	13°	7 490 Cds	490 Lms
				14°	5 621 Cds	441 Lms
				22°	1 949 Cds	423 Lms
				27°	1 456 Cds	439 Lms
				33°	881 Cds	391 Lms
				61°	521 Cds	488 Lms




**Connection to a direct current driver (to be ordered separately).**

Devices must be connected to the driver before switching them on.  
Failure to respect this requirement will damage the devices irreversibly.


## OTHER VERSIONS



**HEMERA 45**  
ON SCENCE WITH  
INTEGRATED DRIVER



**HEMERA 45**  
CAP



**HEMERA 45**  
SNOOT