



# HERA

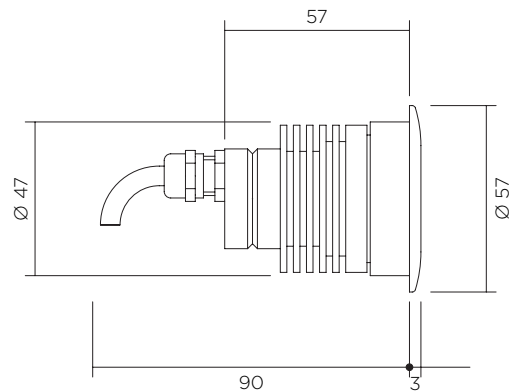


## OUTDOOR RECESSED FLOOR LIGHT RANGE

This compact and efficient recessed floor light offers a wide range of optics and two types of high-efficiency LEDs. Machined in one piece using the best aluminium and stainless-steel alloys, the HERA benefits from anti-corrosion and anti-condensation technology. Equipped with 8-mm-thick tempered glass, it is robust and resists wear due to harsh conditions such as sea air or heavy traffic. HERA is perfect for both accentuating a precise point via an ultra-intensive beam or for achieving more homogenous lighting with wide-beam optics.



VERSION WITH RECESS POT\*

*\*Provide a gravel bed for efficient groundwater drainage*

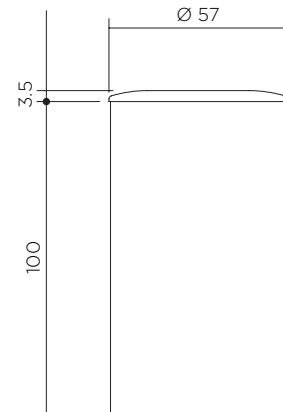

## FEATURES

- 316L stainless-steel bezel
- Zero condensation
- Anti-corrosion
- Beams from 4°
- Colour temperatures: 2700° k, 3000° k, 3500° k, 4000° k
- Maximum LED power: up to 6W

## OPTIONS

- Tunable white
- Dim to warm,
- Other colour temperatures
- Other beams
- Other bezel materials and shapes
- Recess pot


## ACCESSORIES

- Elliptical filters
- Honeycomb grille
- Half-moon screen-printed glass

## CONTROL\*

- 0-10V
- DMX
- DALI
- Wireless

\*According to driver choice



## ACCESSORIES

HERA HALF-MOON & HONEYCOMB GRILLE

# HERA



## POWER\* AND PHOTOMETRY

INDICATIVE DATA FOR LED 3000° K

LED type	Voltage	Max direct current	Power	Beams	Candelas in the axis	Lumens output
LED 1 IRC 80	3 vdc	900mA	3W	4°	28 105 Cds	214 Lms
				7°	8 214 Cds	198 Lms
				13°	3 101 Cds	196 Lms
				17°	984 Cds	184 Lms
				21°	631 Cds	149 Lms
				33°	390 Cds	159 Lms
				52°	286 Cds	193 Lms
LED 2 IRC 90	12 vdc	500mA	6W	13°	7 490 Cds	490 Lms
				14°	5 621 Cds	441 Lms
				22°	1 949 Cds	423 Lms
				27°	1 456 Cds	439 Lms
				33°	881 Cds	391 Lms
				61°	521 Cds	488 Lms




**Connection to a direct current driver (to be ordered separately).**

Devices must be connected to the driver before switching them on.  
Failure to respect this requirement will damage the devices irreversibly.

\*Data may change according to developments in LED technology

## OTHER VERSIONS



HERA  
RECESS POT