



IOTA M/R²³⁰




90° 355°
0.9 KG IRC >90 IP 40 UGR <19



IOTA S/R²³⁰



IOTA M/R²³⁰




IOTA L/R²³⁰

INDOOR 230-VAC RETROFIT SPOTLIGHT BAR RANGE

With a UGR of less than 19, this low-luminance projector diffuses particularly comfortable lighting. Perfect as a replacement for an existing installation, this specific retrofit light adapts to all sources available on the market.

It is also particularly practical, with its screwed-in front panel making it possible to change optics with ease.

Highly attractive, its clean and fine lines render this piece timeless.

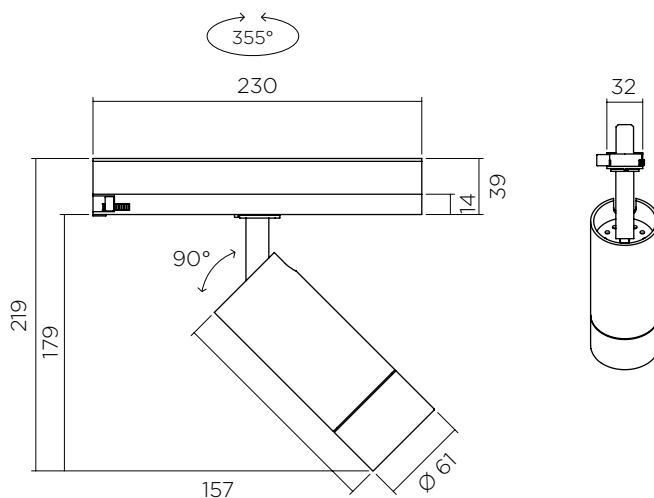

FEATURES

- Bar supply voltage: 230 VAC
- Colour temperatures: 2700° k, 3000° k, 4000° k
- Up to 1200 Lumens
- 3 MacAdam steps

OPTIONS

- Other colour temperatures
- Other beams
- Other finishes (custom RAL)

ACCESSORIES

- Elliptical filters
- Honeycomb grille

CONTROL*

- ON/OFF
- DALI

*According to driver choice



VERSION

IOTA M/P ON SCENCE




IOTA M/R230





850°
—W—
90°
↻
355°
↻
0.9
KG
IRC
>90
IP
40
UGR
<19



POWER* AND PHOTOMETRY*

INDICATIVE DATA FOR LED 3000° K						
LED type	Voltage	Max direct current	Power	Beams	Candelas in the axis	Lumens output
LED 1	35 Vdc	350 mA	12 W	14°	9 815 Cds	1 197 Lms
				20°	5 589 Cds	1 277 Lms
				35°	3 001 Cds	1,278 Lms
*Other photometries available depending on chosen source						
	Direct connection to 230-VAC bar.					
	Devices must be connected to the driver before switching them on. Failure to respect this requirement will damage the devices irreversibly. *Data may change according to developments in LED technology.					

OTHER VERSIONS

 IOTA M/P ON SCONCE	 IOTA M/P ON FLAT SCONCE	 IOTA M/R ON STEM	 IOTA M/R ON 48-V BAR
---	--	--	---