



MICRO TOP LED XS



0.1 KG IRC >90 IP 40 UGR <19 43



MICRO TOP LED
Ø48



MICRO TOP LED
Ø60



INDOOR RANG FIXED RECESSED LIGHTING

All the benefits of the Micro Top LED, in a compact version.


Discreet and elegant, this recessed ceiling light can be mounted into all types of false ceilings with ease (BA13, Staff, Wood, Metal, Concrete, etc.).

Its aluminium body – machined in one piece – and its quality of manufacture and finish make the Micro Top LED the perfect choice for even the most demanding of projects.

With an IP40 rating, it can also be placed in bathrooms or any other humid location.

The precise sorting of LED points and optics guarantees excellent quality of light and an IRC of over 90, in a wide range of colour temperatures and beams.

With an UGR of less than 19, the light ensures great user comfort.

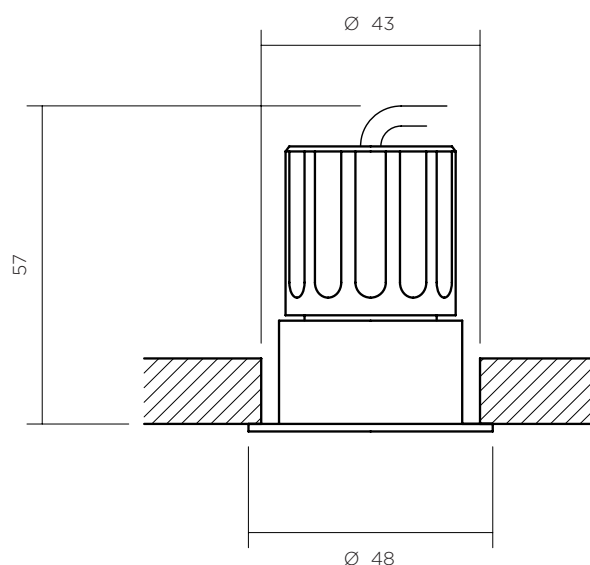

FEATURES

- Beams from 9°
- Colour temperatures: 2700° k, 3000° k, 3500° k, 4000° k
- Maximum LED power up to 4.2 W
- LEDs sorted on 2 MacAdam Ellipses

OPTIONS

- Other colour temperatures
- Other beams
- Other finishes (anodising or powder-coated painting)

ACCESSORIES

- Elliptical filters
- Honeycomb grille

CONTROL*

- 0-10V
- DMX
- DALI
- Wireless

*According to driver choice



VERSION

MICRO TOP LED S AND XS

MICRO TOP LED XS

850°
—W—

F

III

CE

5^Y
YEARS

0.1
KG

IRC
>90

IP
40


UGR
<19

43¹⁰



POWER AND PHOTOMETRY

INDICATIVE DATA FOR LED 3000° K IRC 90 WITH HONEYCOMB GRILLE

LED type	Voltage	Max direct current	Power	Beams	Candelas in the axis	Lumens output
LED	3.2 Vdc	1,400 mA	4.5 W	9°	4 854 Cds	227 Lms
				11°	2 865 Cds	195 Lms
				13°	2122 Cds	187 Lms
				23°	1082 Cds	200 Lms
				35°	422 Cds	156 Lms
<div><div></div><div>Connection to a direct current driver (to be ordered separately).</div></div> <div>Devices must be connected to the driver before switching them on. Failure to respect this requirement will damage the devices irreversibly.</div>						