


# IOTA L/P




IOTA XXS/P IOTA S/P IOTA M/P IOTA L/P

## INDOOR RANGE SCONCE SPOTLIGHT

Capable of delivering up to 45,000 Candelas in the axis, this high-performance spotlight is as powerful as it is pleasing to the eye.

With its silicone optics, the IOTA L provides perfect beam quality and optimised light output, while ensuring a UGR of less than 19 – guaranteeing visual comfort for all.

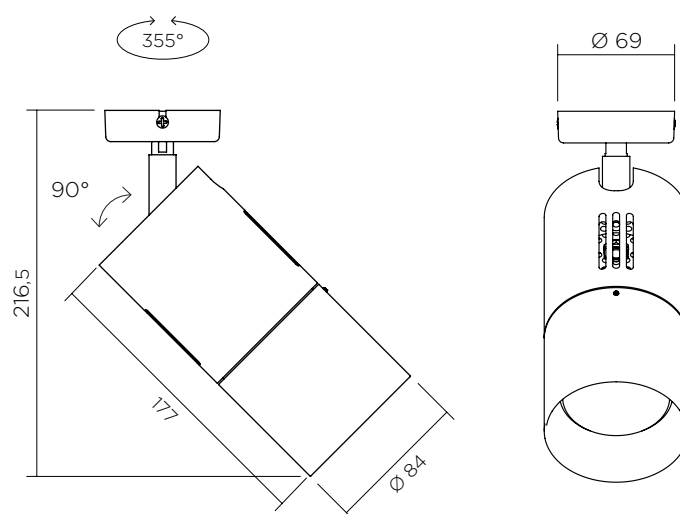

## FEATURES

- Mounted on sconce
- Direct-current power supply via remote driver.
- Maximum LED power: up to 32W
- Optics: from 5° to 60°
- Colour temperatures: 2700° k, 3000° k, 3500° k, 4000° k
- Up to 45,000 Candelas in the axis
- 2 MacAdam steps

## OPTIONS

- RGBW
- Tunable white
- Dim to warm,
- Other colour temperatures
- Other beams
- Other finishes (custom RAL)

## ACCESSORIES

- Elliptical filters
- Honeycomb grille

## CONTROL \*

- 0-10 V
- DALI
- DMX
- Wireless

\*According to driver choice



**ALTERNATIVE VERSION**  
ON 230-VDC BAR

# IOTA L/P

850°  
90° 355°  
1.1 KG  
IRC >90  
IP 40  
UGR <19



## POWER AND PHOTOMETRY

### INDICATIVE DATA FOR LED 3000° K / CRI 90

LED type	Voltage	Max direct current	Power	Beams	Candelas in the axis	Lumens output
LED 2	12 vdc	900 mA	11 W	6,5°	43 157 Cds	798 Lms
LED 3	35 vdc	600 mA	21 W	11°	34 805 Cds	1 710 Lms
				22°	9 725 Cds	1 611 Lms
				35°	4 193 Cds	1 487 Lms
LED 4	37 vdc	900 mA	33 W	16°	28 250 Cds	2 667 Lms
				22°	14 065 Cds	2 481 Lms
				34°	6 627 Cds	2 380 Lms




**Connection to a direct current driver (to be ordered separately).**

Devices must be connected to the driver before switching them on.  
Failure to respect this requirement will damage the devices irreversibly.

\*\*Version with reflector

## OTHER VERSION



IOTA L/R  
ON 230-V ADAPTER