


HERA M



IP 67 IK 10 0,6 KG IRC >90 70°



HERA S Ø 57
HERA M Ø 90

OUTDOOR RANGE RECESSED FLOOR LIGHT

This compact and efficient recessed floor light offers a wide range of optics and three types of high-efficiency LEDs.

Machined in one piece using the best aluminium and stainless-steel alloys, the HERA M benefits from anti-corrosion and anti-condensation technology. Equipped with 8-mm-thick tempered glass, it is robust and resists wear due to harsh conditions such as sea air or heavy traffic.

HERA M is perfect for both accentuating a precise point via an ultra-intensive beam or for achieving more homogenous lighting with wide-beam optics.

FEATURES

- 316L stainless-steel bezel
- Zero condensation
- Anti-corrosion
- Beams from 7°
- Wall washer optics
- LED voltage: 12VDC at 900mA
- Power consumption: 10W
- Colour temperatures: 2700° k, 3000° k, 3500° k, 4000° k
- Up to 1000 Lumens
- 2 MacAdam steps

OPTIONS

- Tunable white
- Dim to warm,
- Other colour temperatures
- Other beams
- Other bezel materials and shapes
- Recess pot


ACCESSORIES

- Elliptical filters
- Honeycomb grille
- Half-moon screen-printed glass

CONTROL*



- 0-10V
- DMX
- DALI
- Wireless

*According to driver choice

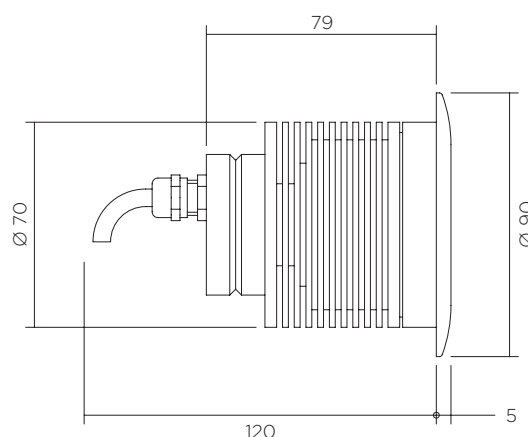

VERSION WITH
RECESS POT*

*Provide a gravel bed
for efficient groundwater
drainage

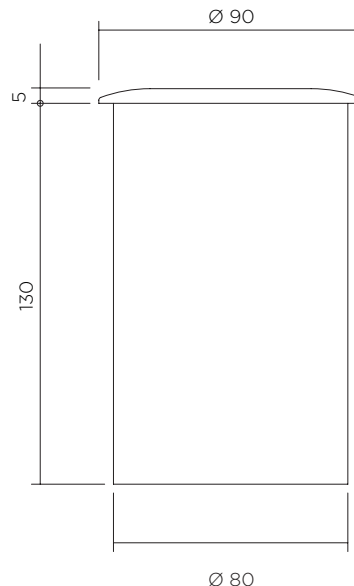

ACCESSORIES

HERA S HALF-MOON & HONEYCOMB GRILLE

HERA M



POWER* AND PHOTOMETRY

INDICATIVE DATA FOR LED 3000° K / CRI>90

LED type	Voltage	Max direct current	Power	Beams	Candelas in the axis	Lumens output
LED 2	12 vdc	900mA	10,7W	7°	34 925 Cds	776 Lms
LED 2B	12 vdc	900mA	10,4W	12°	19 590 Cds	994 Lms
				25°	3 796 Cds	740 Lms
				34°	1 987 Cds	545 Lms

LED type	Voltage	Max direct current	Power	Beams	Wall washer	Lumens output
LED 3B	34 vdc	300mA	10W	25°/61°	●	542 Lms




Connection to a direct current driver (to be ordered separately).

Devices must be connected to the driver before switching them on.
Failure to respect this requirement will damage the devices irreversibly.

*Data may change according to developments in LED technology


OTHER VERSIONS



HERA S
Ø 57



HERA S
RECESS POT



HERA M
RECESS POT