



ALVEA/L4



UGR <19 IRC >90 IP 20



LUMEO





ALVEA

INDOOR FIXED RECESSED LIGHTING RANGE

This small recessed linear light will surprise you with its discretion and its fantastic design. Designed to be low luminance and equipped with a wide variety of optics, it offers users comfortable and efficient light.

Offering adjustable configuration (also available in a square version), optics, finish, colour temperature and quantity of LED modules: the ALVEA is a fully modular choice. What's more, each module can be controlled independently.

Thanks to its wide variety of combinations, this product offers extensive ability to adapt to the various configurations of your spaces.

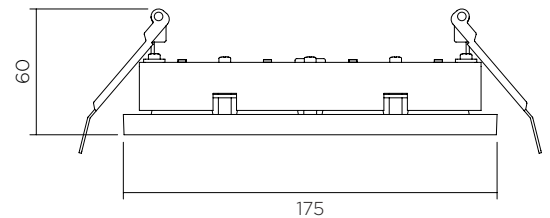

EMBEDDING



FEATURES

- Direct-current power supply via remote driver.
- Low luminance
- Colour temperatures: 2700° k, 3000° k, 3500° k, 4000° k and 5700° k
- Optics: from 10° to 50°
- Finish: black or white

OPTIONS

- Other configurations
- Other colour temperatures
- Other beams

ACCESSORIES

CONTROL*

- ON/OFF
- 0-10 V
- DALI
- DMX
- Wireless


*According to driver choice



SIMULATION

LOW LUMINANCE ALVEA composed of a module of four LED points with two types of integrated 20° and 50° optics.

ALVEA/L⁴



POWER* AND PHOTOMETRY*

INDICATIVE DATE FOR LED 2700° K IRC93

LED type	Voltage	Max direct current	Power	Beams	Candelas in the axis	Lumens output
LED	11.6 Vdc	700 mA	8.1 W	10°	11 406 Cds	695 Lm
				17°	5 745 Cds	676 Lm
				18°	5 582 Cds	620 Lm
				30°	2 206 Cds	648 Lm
				41°	1 154 Cds	593 Lm
				17x44°	2 267 Cds	791 Lm


*Other photometries available depending on chosen source



Connection according to choice of module.

Devices must be connected to the driver before switching them on.
Failure to respect this requirement will damage the devices irreversibly.

OTHER VERSION



LUMEO